



## **G12 42,000 BTU INFRARED RADIANT HEATER**




- + Stainless Steel Construction**
- + Lightweight**
- + Low Maintenance**
- + Propane or Natural Gas**
- + Fuel Savings**
- + Heavy Duty or Standard Filter**



## G -12 42,000 Btu Radiant Heater

Typical installation layout

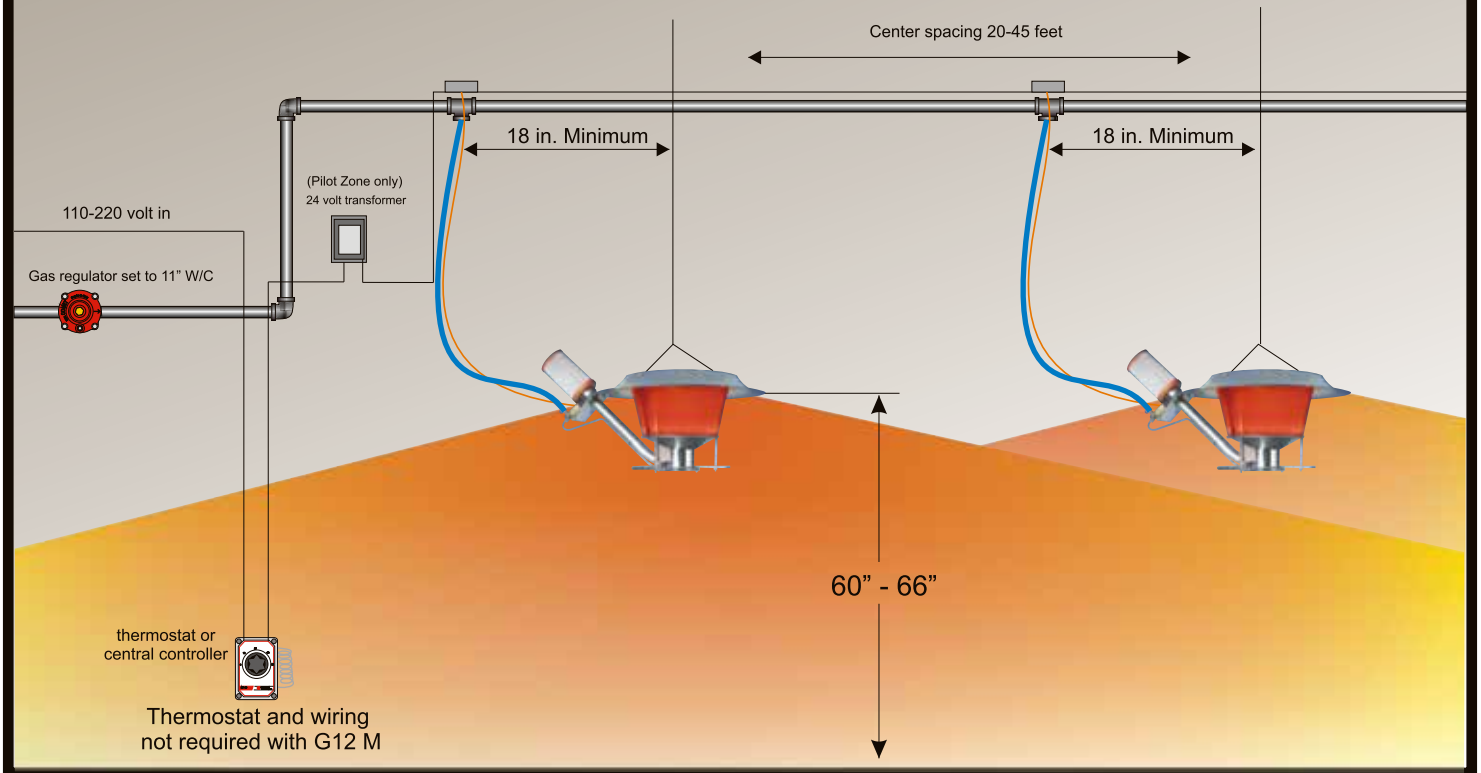

### G12 HEATER SPECIFICATIONS

#### Capacity

Maximum Btu/hr 42,000  
Maximum Watt/hr 12,000

Supply Pressure To Heater  
Propane 11 in. Water Column

#### Physical Size & Weight

Length 26 in.  
Width 23 in.  
Height 13 in.  
Weight 15 lb.

Installation Height 60 in.

Center Spacing 20-30 ft.

#### Minimum Clearance to Combustibles

Top 39 in.  
Side 39 in.  
Below 39 in.

Bird Coverage  
Broilers 2000-3000

A natural gas version of the G-12 is available also.



#### Models:

G12 M (individual thermostatically controlled w/pilot)  
G12 PZ (pilot zone) Infrared Radiant Heater

